

IBOX-205 Plus



Features:


- ◇ All aluminum structure, fanless design;
- ◇ Support Intel Core i5 4300U dual core processor;
- ◇ Max. Support DDR3L 8G RAM;
- ◇ Support 1*MSATA Slot, 1*2.5" HDD;
- ◇ Support WIFI/3G/4G (Choose one from three) ;
- ◇ Support 6*COM (COM3 RS232/422/485 Optional) ;
- ◇ Support OS:



Specification

Model	IBOX-205 Plus
Color	Black (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Onboard Intel Core i5 4300U (dual core quad threading, 1.9Ghz, Max. Turbo 2.9Ghz) ;
RAM	Support 1*DDR3L 1333/1600MHz SODIMM RAM Slot, Max. Support 8GB
BIOS	AMI UEFI BIOS
Display Chip	Integrated Intel HD Graphics 4400
Display Port	1*VGA, 1*HDMI (Support synchronous and asynchronous dual display)
Front I/O	4*USB2.0, 1*COM, 1*Power Switch;
Rear I/O	2*USB3.0, 5*COM (COM3 RS232/422/485 Optional) , 2*1000M LAN 1*VGA, 1*HDMI, 1*DC12V Input, 1*Mic, 1*Line Out
Expansion Slot	Support 1*MINI PCIE Slot (Support MSATA) ; Support 1*MINI PCIE Slot (WIFI/3G/4G Optional) , Embedded SIM Slot; Optional Ports: GPIO、LPT、PS/2 (Standard version doesn't include these ports)
Network	2*Intel i211-AT 1000M LAN
Storage	Support 1*MSATA Slot, 1*2.5" HDD (2*2.5" HDD Optional)
Input Voltage	Support DC 12V Input
Other Function	Auto power on when there is electricity, Timing boot, Wake on LAN, PXE boot, Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0°C ~ +50°C (Commercial HDD) , -20°C ~ +60°C (Industrial SSD) , Surface air flow
Work Humidity	0% ~ 95% non-condensing
Certificates	CE、 CCC、 FCC Class A、 ROHS
Dimension	234 * 200 * 54mm
Net Weight	2.0kg
Application	Industrial Automation, Medical, Logistics Transportation, Warehouse, Electronic Education etc.

IBOX-205 Plus Drawing

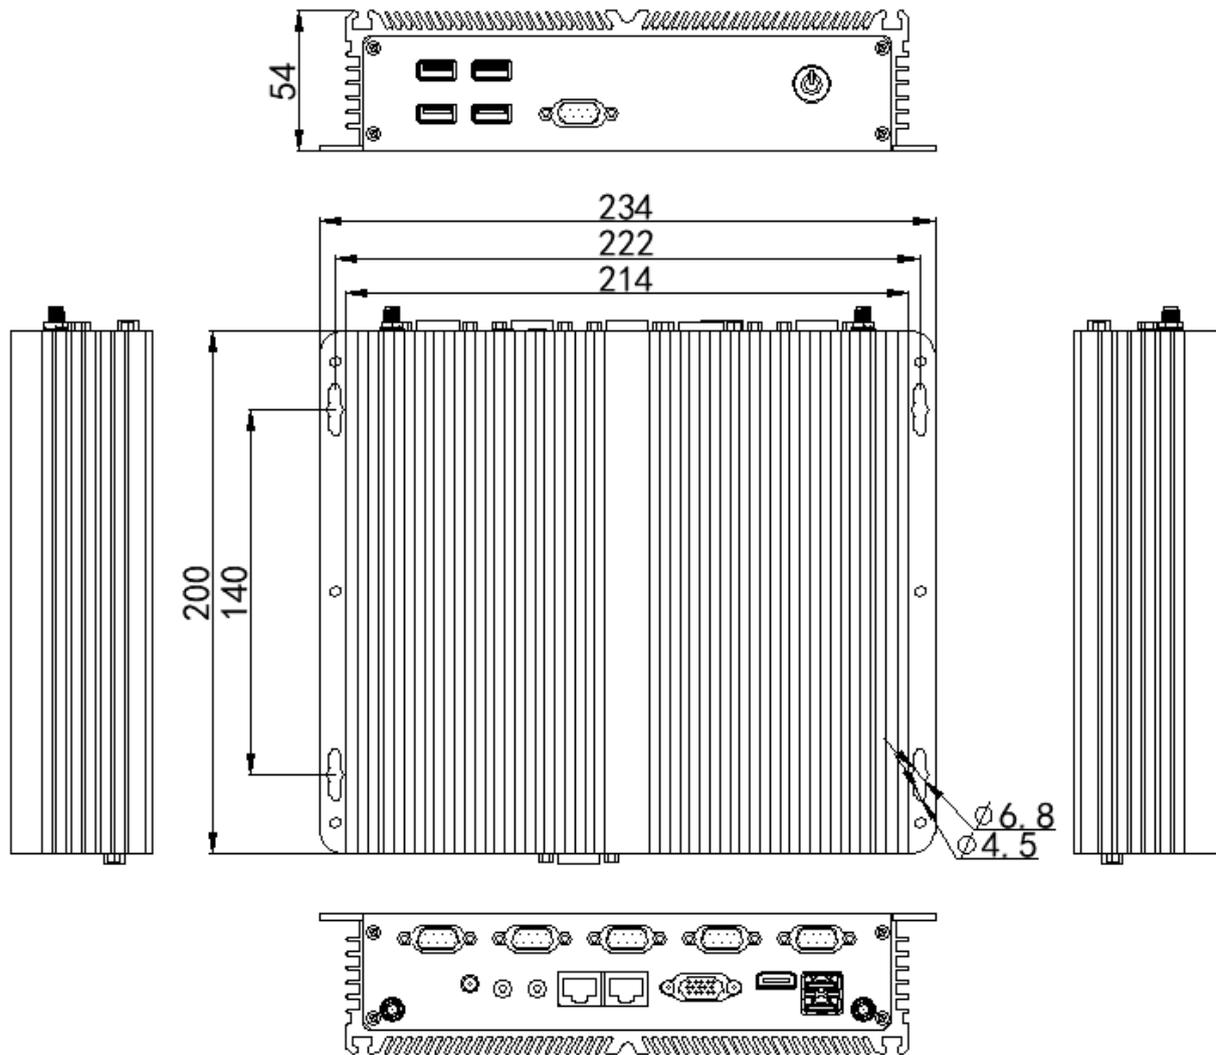

Accessories List

Name	Quantity	Specification
Power Adapter	1	12V 5A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
CD Driver	1	Neutral

Order Information

Configuration 1	IBOX-205 Plus	Intel Core i5 4300U	Standard Port
-----------------	---------------	---------------------	---------------